

# Updating your BTECH DMR-6X2 PRO

To better understand the process, please read through all the steps before beginning the update. Also, please be sure that your BTECH radio's battery is sufficiently charged before you begin.

## Very Important First Step

1. Launch your currently installed BTECH CPS software and **backup your existing codeplug** to a file on your computer
  - The following updates will **erase the contents** of your BTECH radio.
2. **Verify** that your codeplug backup file is saved and stored in a known, safe location

## Installing the Latest Software

3. Extract the update package to any folder on your computer
  - **DMR-6X2-PRO-101J.zip**
4. Launch the installer for the USB Virtual Com Port Driver included in the package
  - **USB Virtual Com Port Driver.exe**
  - Located in the **USB Drivers** subfolder of the package
  - Use the **x64** version for 64-bit systems
  - Use the **x86** version for 32-bit systems
5. Launch the CPS 1.01k installer included in the package
  - **DMR\_6X2Pro\_Setup\_1.01k.exe**
  - Install to C:\ DMR-6X2-PRO-1.01k\ or choose another location

Please proceed with the Firmware update procedure below

## Updating the BTECH DMR-6X2 PRO Firmware


6. Turn off your BTECH radio
7. Press and hold both of the following buttons
  - Push To Talk (PTT) button
  - Alarm button (orange button above display)
8. Turn on your BTECH radio
  - The LED will blink red to indicate that your radio is in update mode
  - Release the PTT and Alarm buttons
9. Connect your radio to the computer using the USB cable

- Ensure that the cable is firmly connected to both the computer and your radio

10. Launch the Firmware Update application

- **From the toolbar of the Installed CPS (1.01i) select Tool < Firmware Upgrade**

*i. You may need to run the CPS as your computer administrator to launch the firmware upgrade tool*

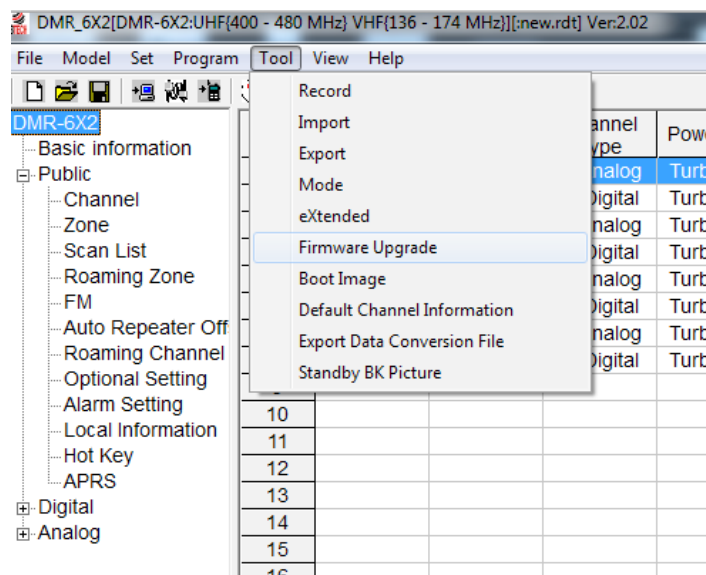

11. Click the “Open Update File” button

12. Browse to the new firmware file


- **DMR\_6X2II\_V1.01j\_20230515 spi**
- Located in the **DMR-6X2 PRO Firmware Update 1.01j** subfolder of the package

13. Click Open

- File opened successfully message will be displayed
- Click OK

14. Select the communications settings

- Choose the Com Port assigned to the USB Virtual Com Port Driver. *If the COM port is not available, check that your radio is connected to your computer*
- Choose the Com Speed

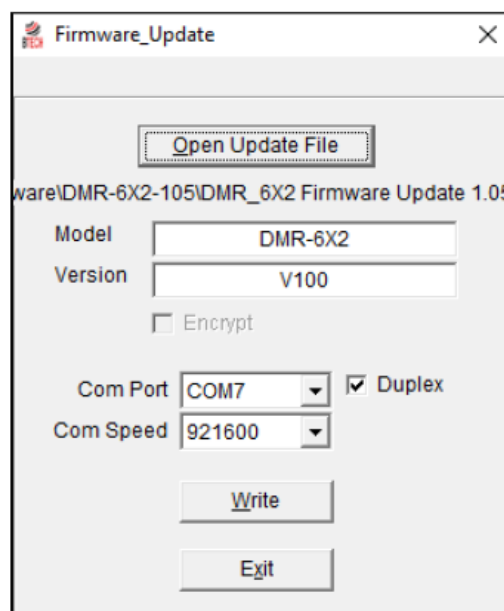

*Firmware update using the QX\_Firmware\_Update application*

- Default is 921600
- Enable Duplex

15. Click Write

- The updated firmware will be applied to your BTECH radio
- Upon completion of the update, your radio will reboot

*If your radio shows the Clock Set screen at this point, the update may not have succeeded. Please retry the update procedure beginning at Step 6, carefully following each step in order. As always, please feel free to reach out to our Technical Support team if you have any questions or issues.*

**Please leave the Firmware Update application running and proceed with the Icon Update procedure below (Icon update not required if previously upgraded to the current Icon Update)**

**A MCU Update is required after a firmware update, see “Resetting the Main Control Unit (MCU)” below on this procedure**

## Resetting the Main Control Unit (MCU)

16. Turn off your BTECH radio
17. Press and hold both of the following buttons
  - Push To Talk (PTT) button
  - PF1 key (the key below the PTT button on the left side of your radio)
18. Turn on your BTECH radio
  - The display will show “Are you sure you want to Initialize radio?”
  - Release the PTT and PF1 buttons, Press the “\_” (above the P1 button) to Confirm
  - **Please wait** - do not interrupt the process
  - Upon completion of the reset, your radio will reboot
19. When prompted, set the date and time
  - Use the P1 key to navigate the date / time fields
  - Use the Up / Down keys to change the values in the fields
  - The date format is DD-MM-YYYY
  - Use the Green key to save the date / time settings
20. Launch the new version of CPS (1.01k), and open the backup of your codeplug created in Step 1
21. Rewrite your original codeplug to your radio

Congratulations! You have finished updating your DMR-6X2 PRO.

We sincerely hope you have an enjoyable experience with your BTECH radio.

Please let us know if you experience any issues with the new firmware; you can earn a reward via our new “bug bounty” program!

73,

BTECH