




Icon Updating for DMR-6X2 Series Radios

To update the icons on the DMR-6X2 Series Radios using the new file **DMR_6X2_PIC_V2.00.spi** (located in this update package), follow these steps:

1. **Prepare the Radio:**
 - a. Hold down the **PTT** key and the **PF2** key (the bottom side key) simultaneously.
 - b. While holding these keys, power on the radio. The LCD will display **UPDATE MODE**.
2. **Connect to the Computer:**
 - a. Use a PC cable to connect the radio to your computer.
3. **Launch the Firmware Update Tool:**
 - a. Open the CPS (programming software) and navigate to the firmware upgrade option from the toolbar.
 - b. Alternatively, you can launch the tool directly from your computer:
 - i. Navigate to **C:/[Your CPS Installed Folder]/Update** and run **QX_Firmware_Update Program Directly**
4. **Load the Update File:**
 - a. In the update tool, click **Open Update File** and select **DMR_6X2_PIC_V2.00.spi**.
5. **Set Communication Settings:**
 - a. Set **Com Speed** to **921600**.
 - b. Enable the **Duplex** checkbox.
6. **Update the Radio:**
 - a. Click **Write** to begin the update process. The tool will update the radio with the latest icons.
7. **Reboot the Radio:**
 - a. Once the update is complete, reboot the radio.

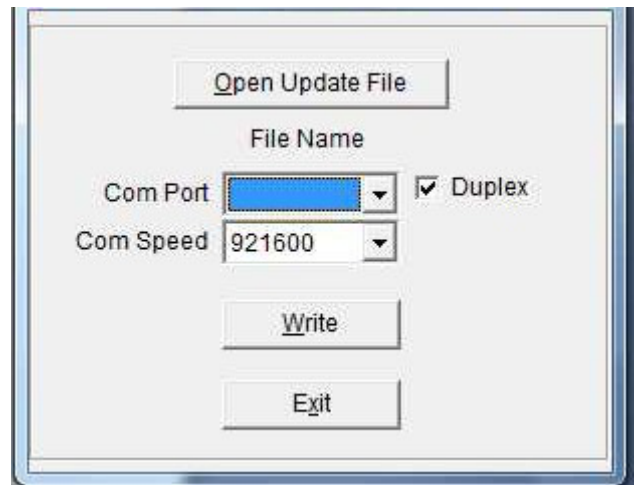

This procedure ensures your BTECH DMR-6X2 Series radio is updated with the latest icons file set.